
1. Application

INDUSTRIAL DC-DC

3. Picture



2. Features


Hi-Pot: 3750 VAC

Basic insulation comply with IEC 60664,IEC62368


ROHS Reach Compliant

Operating Temperature Range -40 to +130

4. Schematic

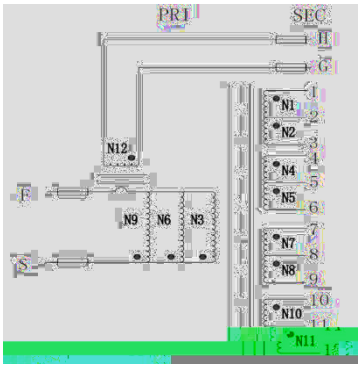

5. Dimension Unit: mm

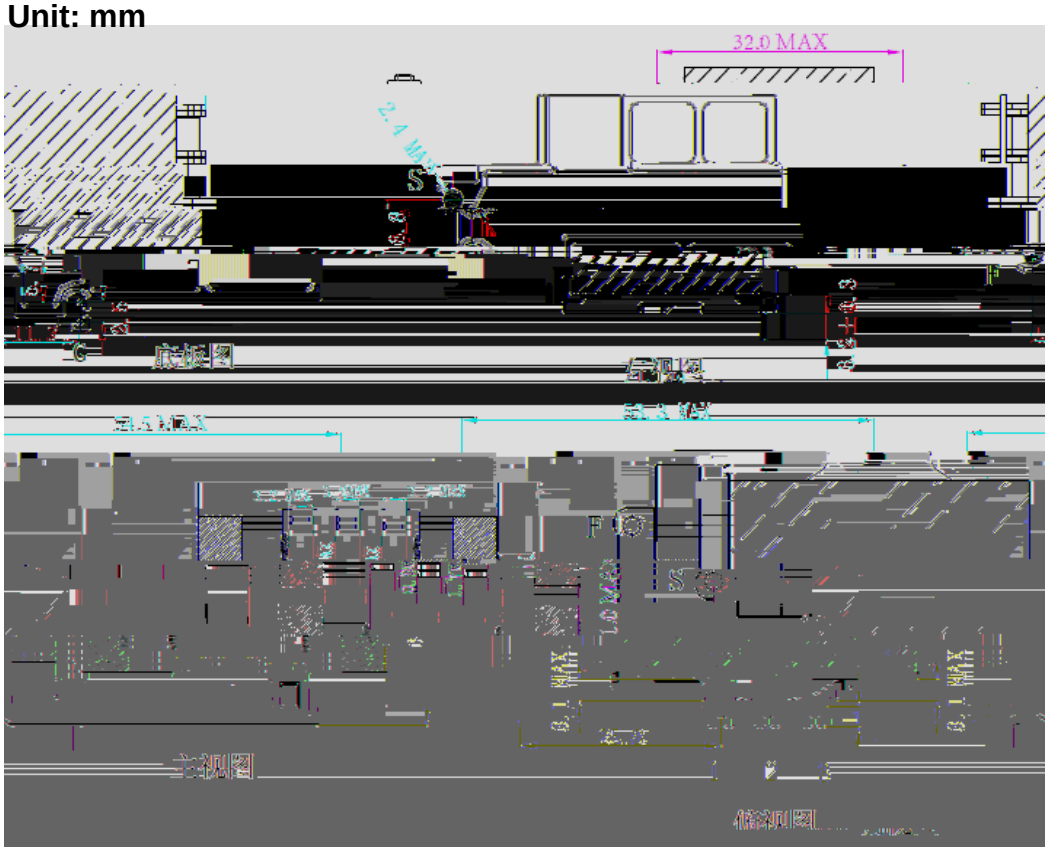

6. Electrical Characteristics

Electrical Specifications@25								
Part NO.	Output power(W)	Inductance(uH) 100KHz,1V	Lk(uH)MAX 100KHz,1V	Turns Ratio 20KHz,1V	DCR (mΩ MAX)			HI-POT 1mA/3S
2216038-0285	1300	S~F	S~F	S-F:1-2:2-3	S~F	1~2	2-3	PRI-SEC
		220	2.5	1:0.0625:0.0625	25	0.5	0.5	3750 VAC

Tel (86 769)8652 8122
http://www.pcthk.com
Company: PCT DONGGUAN ELECTRICAL CO., LTD
Address Xiang Xi Ind. Zone, Shi Pai Town, Dongguan, Guangdong, CHINA (Postal Code 523345)